
Antenna THP 03 405 D

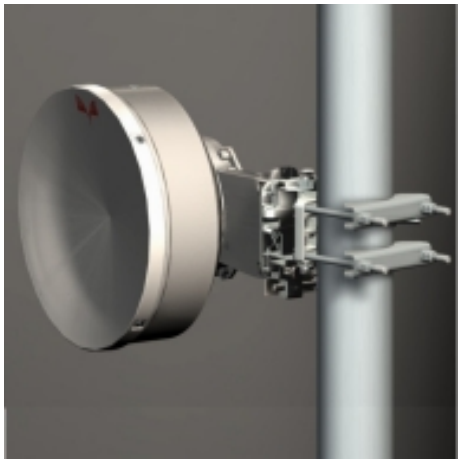

General Specifications

Diameter	0.3m
Standard Colour	RAL 7035
Shroud	Low profile
Antenna Input	Interface for IEC waveguide R 500 (R 400 upon request)
Polarization	Dual


Mechanical Characteristics


Pole	50-115 mm
Elevation-fine adjustment	+/- 15 deg
Azimuth-fine adjustment	+/- 20 deg
Side struts, included	0
Side struts, optional	0
Net weight	9 Kg
Radome	Rigid plastic
Wind velocity Operational	45 m/s
Wind velocity Survival	70 m/s
Wind deflection	<0.3 times the -3 dB beam width
(with a wind velocity of 45 m/s)	Specified wind deflection applies for 115 mm dia mounting pipe only


Antenna Dimensions

(pole mount included)

Height	385.0 mm
Width	586.0 mm
Depth	219.0 mm

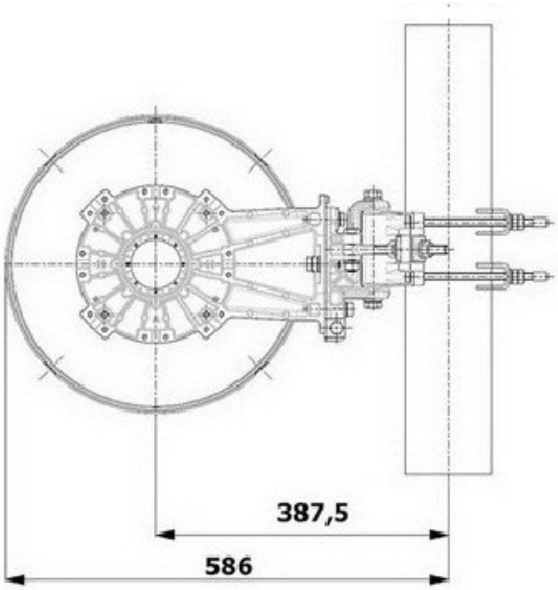

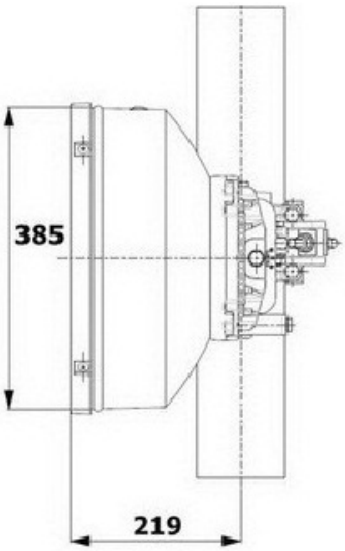

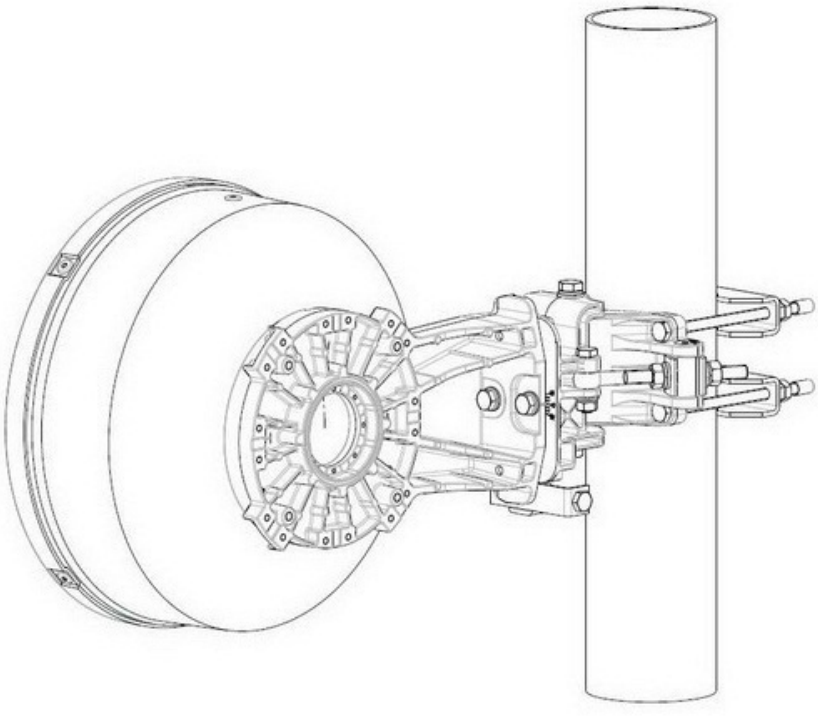

Wind forces at wind velocity survival rating and with 25 mm (1") ice load

Axial force	472 N
Side force	234 N
Twisting Moment	167 N?m

Maximum forces exerted on a supporting structure as a result of wind (survival rating) from the most criticaldirection for each parameter. These values may not occur simultaneously. All forces are refered to themounting pipe of 115 mm diameter.

Electrical Characteristics

Frequency range	40.5 - 43.5 GHz
Gain, low band	40.6 dBi
Gain, mid band	41.0 dBi
Gain, top band	41.4 dBi
Return Loss	17.7 dB
VSWR	1.3
HPBW	1.4°
Front to back ratio	63 dB
Isolation	35 dB
XPD	30 dB
Electrical Compliance	Class 3B
	ETSI 302 217

Shipping Information

Gross weight	12 Kg
Height	400 mm
Depth	400 mm
Width	600 mm

faini telecommunication systems	RADIATION PATTERN ENVELOPE ANTENNA TYPE THP 03-405	1502

