Antenna THP12-071SWB

Antenna THP12-071SWB



General Specifications

Diameter	1.2m
Standard Colour	RAL 7035
Shroud	Low profile
Antenna Input	Interface for IEC waveguide R84
Polarization	Single


Mechanical Characteristics


Pole	115 mm
Elevation-fine adjustment	+/- 15 deg
Azimuth-fine adjustment	+/- 10 deg
Side struts, included	1
Side struts, optional	0
Net weight	50 Kg
Radome	Rigid plastic
Wind velocity Operational	180 Km/h (200 Km/h with second additional side strut)
Wind velocity Survival	250 Km/h
Wind deflection	<0.3 times the -3 dB beam width
(with a wind velocity of 45 m/s)	Specified wind deflection applies for 115 mm dia mounting pipe only

Antenna Dimensions

(pole mount included)

Height	1260 mm
Width	1260 mm
Depth	818 mm

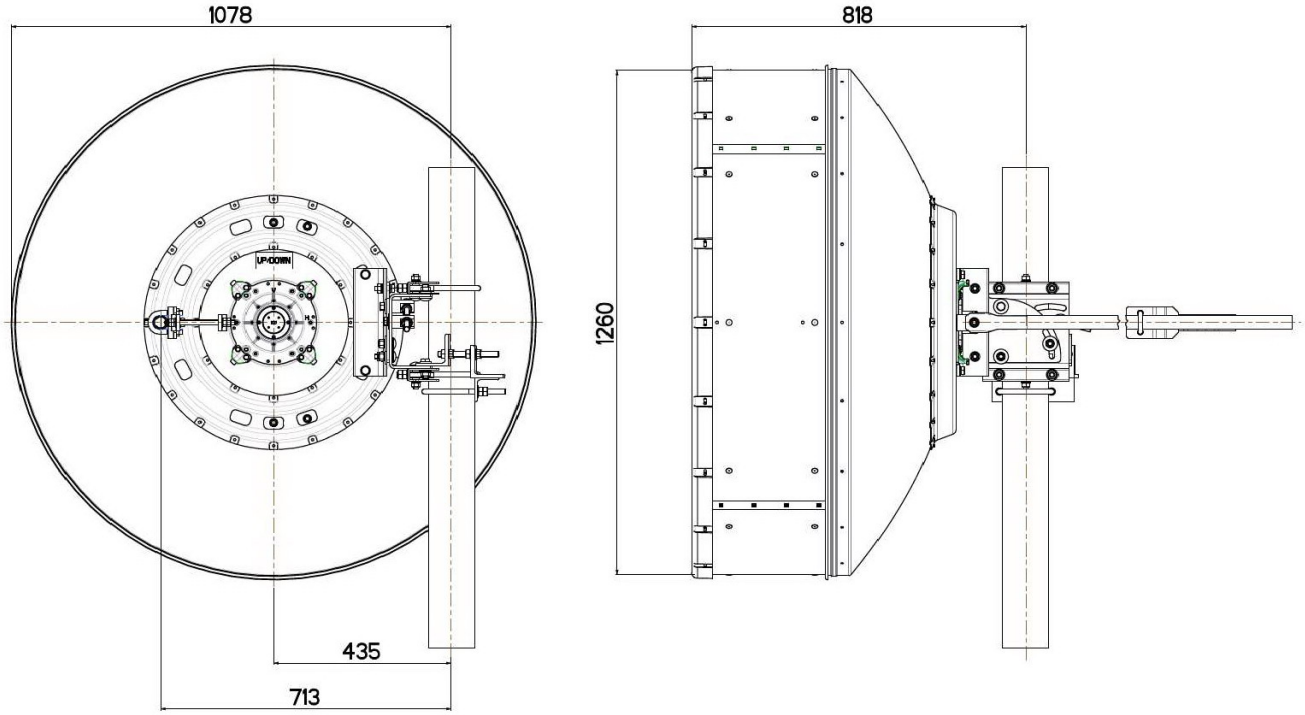

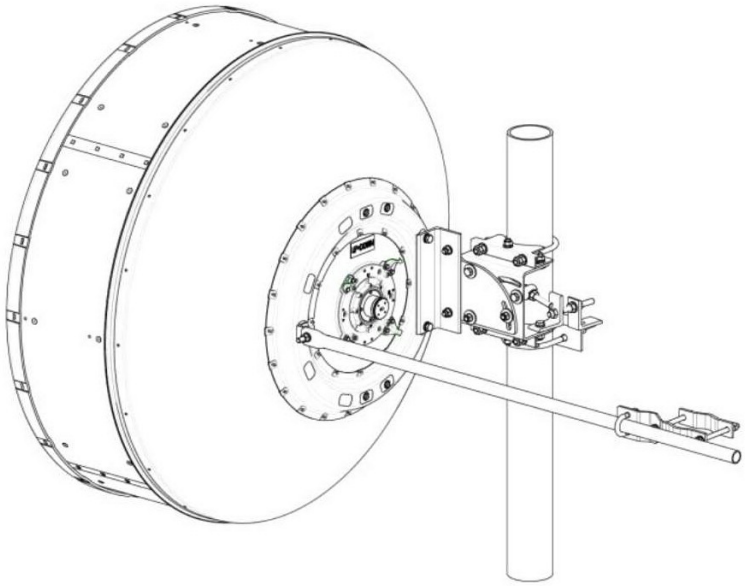

Wind forces at wind velocity survival rating and with 25 mm (1") ice load

Axial force	5270 N
Side force	2610 N
Twisting Moment	2110 N m


Maximum forces exerted on a supporting structure as a result of wind (survival rating) from the most critical direction for each parameter. These values may not occur simultaneously. All forces are refered to the mounting pipe of 115 mm diameter.

Electrical Characteristics

Frequency range	7.125 - 8.5 GHz
Gain, low band	36.4 dBi
Gain, mid band	37 dBi
Gain, top band	37.6 dBi
Return Loss	17.7 dB
VSWR	1.3
HPBW	2.5 deg
Front to back ratio	63 dB
Isolation	NA
XPD	30.0 dB
Electrical Compliance	ETSI 302 217 Class 3 ; Anatel Ato 932 Class 2a
	ETSI 302 217

Shipping Information

Gross weight	78 Kg
Height	1530 mm
Depth	480 mm
Width	1380 mm

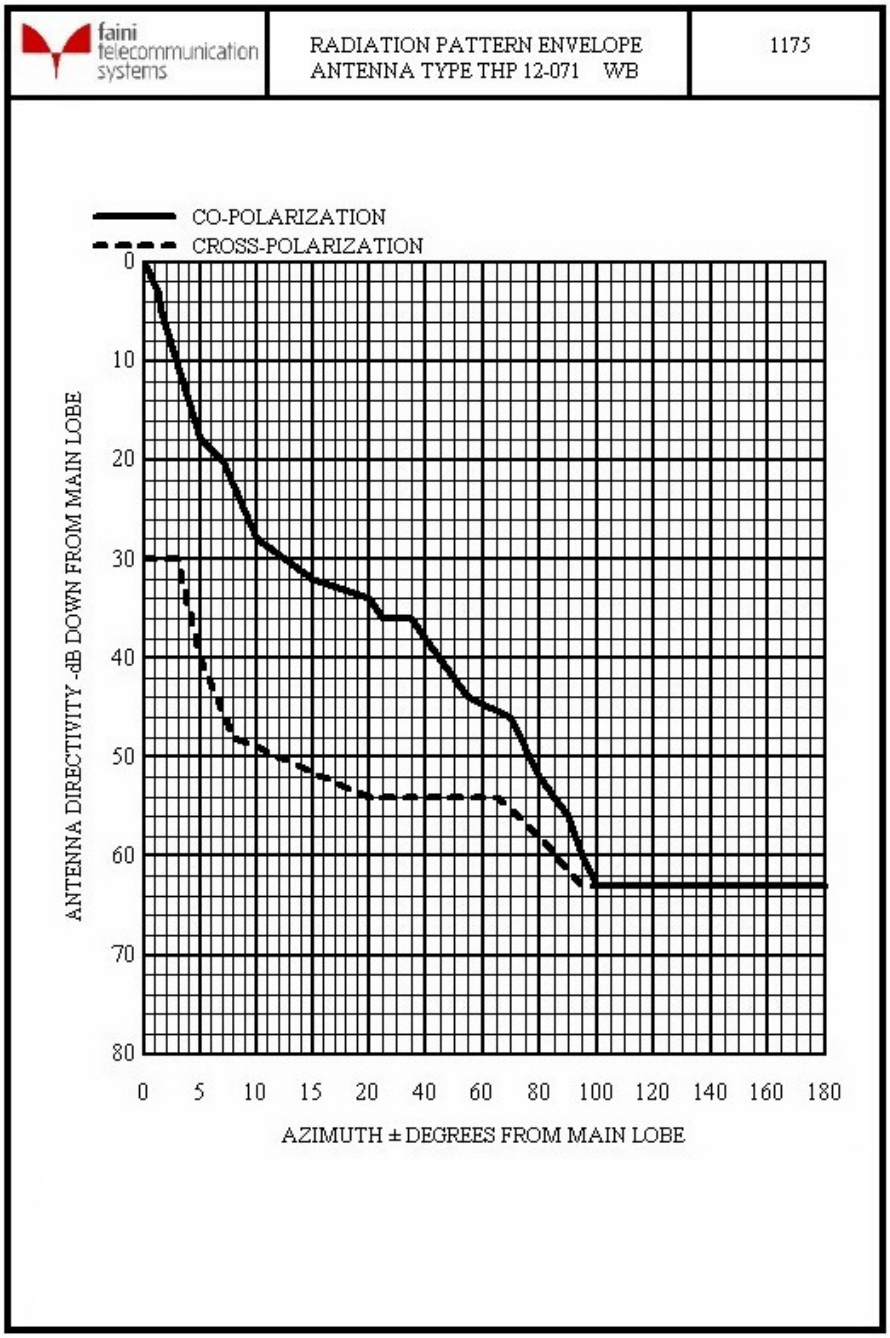
faini telecommunication systems
RADIATION PATTERN ENVELOPE
ANTENNA TYPE THP 12-071 WB
1175
CO-POLARIZATION
CROSS-POLARIZATION
ANTENNA DIRECTIVITY -dB DOWN FROM MAIN LOBE
0
10
20
30
40
50
60
70
80
0 5 10 15 20 40 60 80 100 120 140 160 180
AZIMUTH ± DEGREES FROM MAIN LOBE