
Antenna THP 02 245 S

Antenna THP 02 245 S

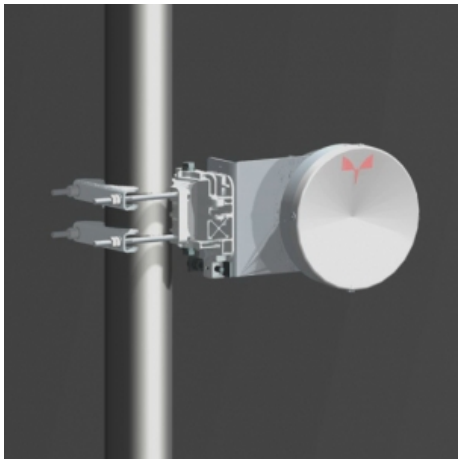

General Specifications

Diameter	0.2m
Standard Colour	RAL 7035
Shroud	Low profile
Antenna Input	Interface for IEC waveguide R 220
Polarization	Single


Mechanical Characteristics


Pole	50÷115 mm
Elevation-fine adjustment	+/- 15 deg
Azimuth-fine adjustment	+/- 20 deg
Side struts, included	0
Side struts, optional	0
Net weight	6 Kg
Radome	Rigid plastic
Wind velocity Operational	30 m/s
Wind velocity Survival	70 m/s
Wind deflection	<0.3 times the -3 dB beam width
(with a wind velocity of 30 m/s)	Specified wind deflection applies for 115 mm dia mounting pipe only

Antenna Dimensions

(pole mount included)

Height	239 mm
Width	476 mm
Depth	138 mm

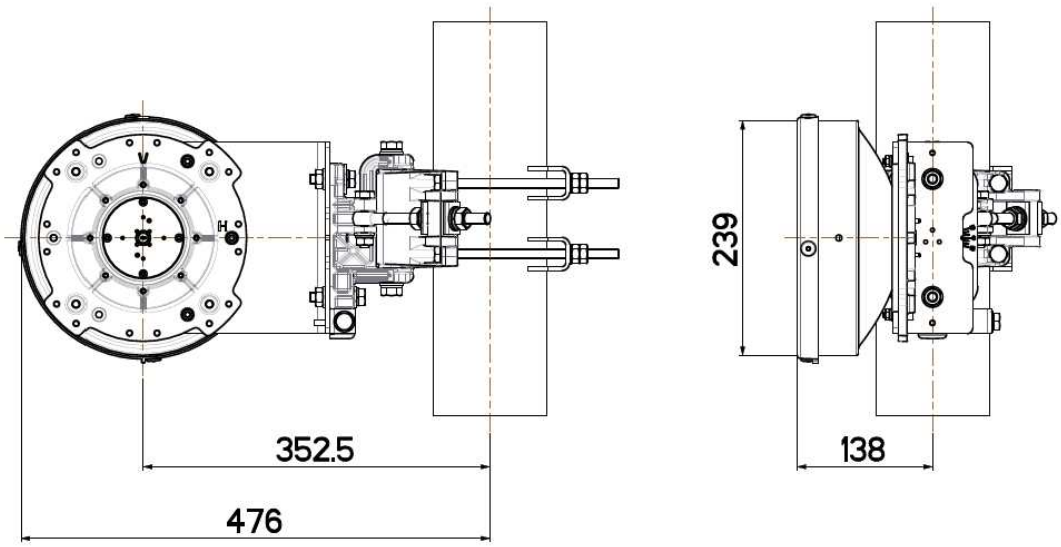

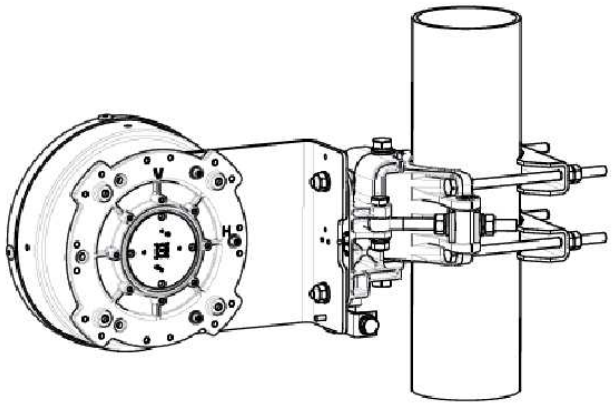

Wind forces at wind velocity survival rating and with 25 mm (1") ice load

Axial force	209 N
Side force	104 N
Twisting Moment	70 N m

Maximum forces exerted on a supporting structure as a result of wind (survival rating) from the most critical direction for each parameter. These values may not occur simultaneously. All forces are refered to the mounting pipe of 115 mm diameter.

Electrical Characteristics

Frequency range	24.25 - 26.5 GHz
Gain, low band	32.2 dBi
Gain, mid band	32.5 dBi
Gain, top band	32.8 dBi
Return Loss	17.7 dB
VSWR	1.3
HPBW	3.8°
Front to back ratio	56 dB
Isolation	NA
XPD	30 dB
Electrical Compliance	Class 2
	ETSI 302 217

Shipping Information

Gross weight	8 Kg
Height	430.0 mm
Depth	490.0 mm
Width	330.0 mm

faini telecommunication systems	RADIATION PATTERN ENVELOPE ANTENNA TYPE THP 02-245 S	1058

Issued on 02-03-2003 .....

FREQUENCY BAND: 24500 to 26500 MHz
DIAMETER: 0.2 m
GAIN: SINGLE POLARIZED 32.5 ± 0.2 dBi at 25500 MHz
VSWR: 1.3 max
HPBW: 3.8 deg. Azimuth 3.8 deg. Elevation

