
Antenna THP 08 212 D

Antenna THP 08 212 D

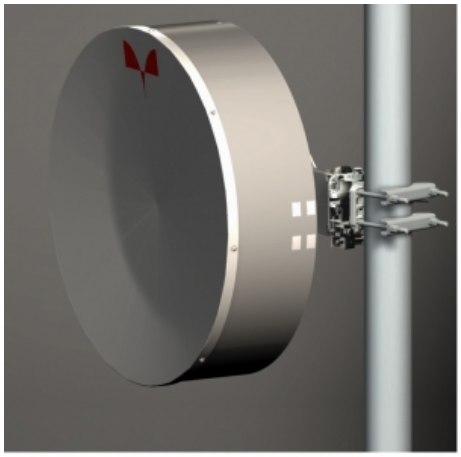

General Specifications

Diameter	0.8m
Standard Colour	RAL 7035
Shroud	Low profile
Antenna Input	Interface for IEC waveguide R 220
Polarization	Dual


Mechanical Characteristics


Pole	115 mm
Elevation-fine adjustment	+/- 15 deg
Azimuth-fine adjustment	+/- 20 deg
Side struts, included	0
Side struts, optional	1
Net weight	17.5 Kg
Radome	Rigid plastic
Wind velocity Operational	30 m/s (with optional strut Kit 45 m/s)
Wind velocity Survival	70 m/s
Wind deflection	<0.3 times the -3 dB beam width
(with a wind velocity of 30 m/s)	Specified wind deflection applies for 115 mm dia mounting pipe only


Antenna Dimensions

(pole mount included)

Height	842 mm
Width	814 mm
Depth	434 mm

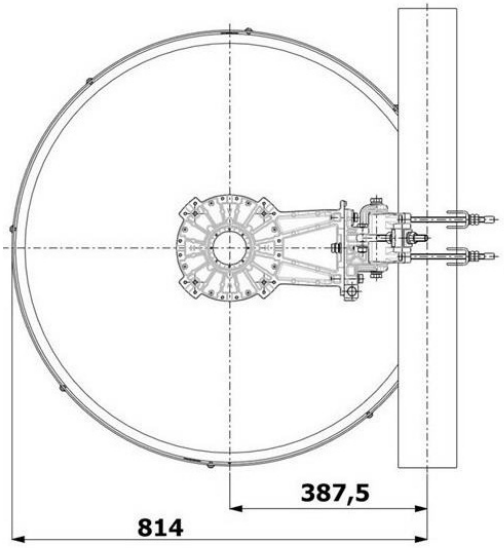

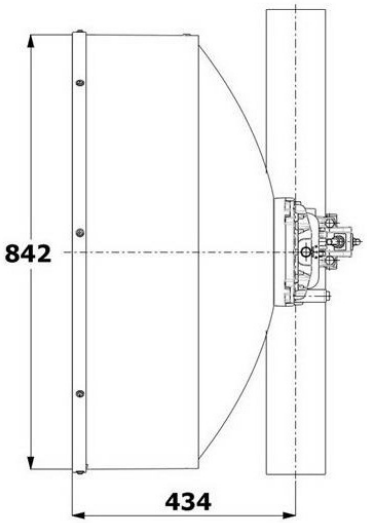

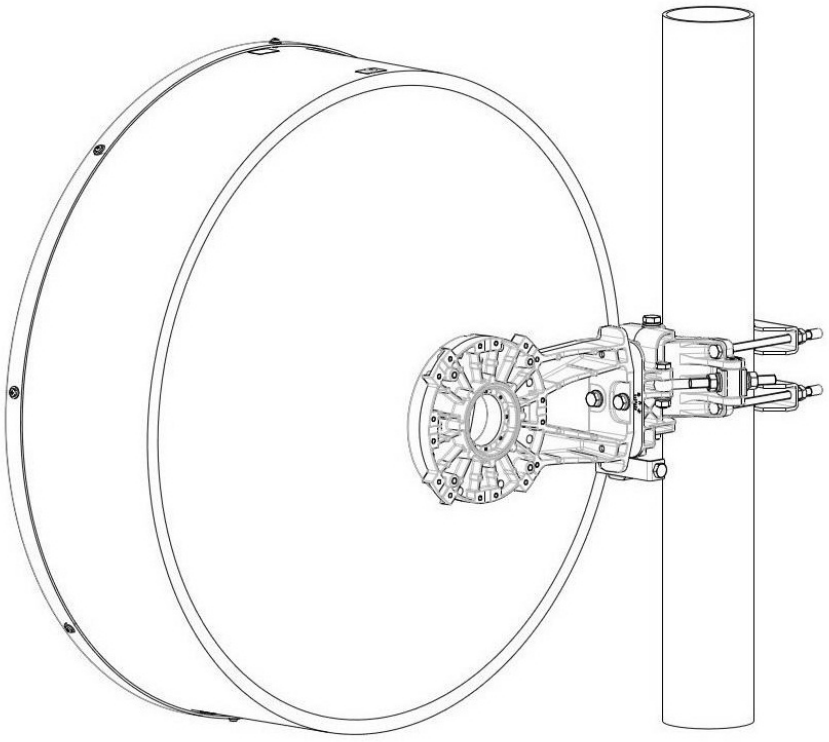

Wind forces at wind velocity survival rating and with 25 mm (1") ice load

Axial force	2230 N
Side force	1105 N
Twisting Moment	821 N m


Maximum forces exerted on a supporting structure as a result of wind (survival rating) from the most critical direction for each parameter. These values may not occur simultaneously. All forces are refered to the mounting pipe of 115 mm diameter.

Electrical Characteristics

Frequency range	21.2 - 23.6 GHz
Gain, low band	42.5 dBi
Gain, mid band	42.8 dBi
Gain, top band	43.1 dBi
Return Loss	17.7 dB
VSWR	1.3
HPBW	1.3°
Front to back ratio	67.0 dB
Isolation	35.0 dB
XPD	30.0 dB
Electrical Compliance	Class 3
	ETSI 302 217

Shipping Information

Gross weight	26 kg
Height	700 mm
Depth	920 mm
Width	930 mm

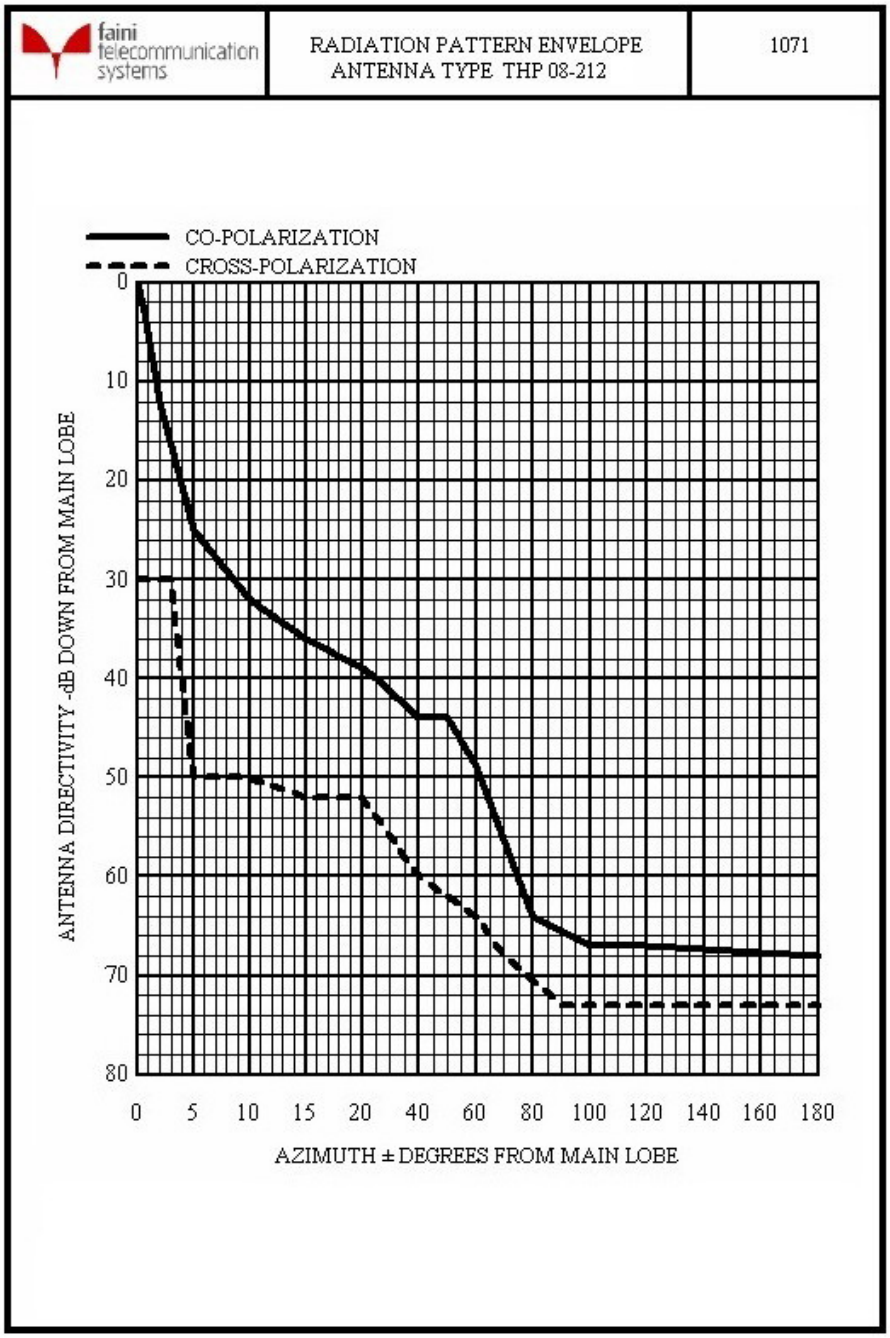
faini telecommunication systems
RADIATION PATTERN ENVELOPE
ANTENNA TYPE THP 08-212
1071
CO-POLARIZATION
CROSS-POLARIZATION
ANTENNA DIRECTIVITY -dB DOWN FROM MAIN LOBE
0
10
20
30
40
50
60
70
80
0 5 10 15 20 40 60 80 100 120 140 160 180
AZIMUTH ± DEGREES FROM MAIN LOBE